



AQUASCREEN SERIES B

The Complete Range of Inclined Bar Screens

Aquatec-Maxcon have one of the most comprehensive range of bar screens in the world.



A major feature of our technology includes the range of inclined bar screens that provide a robust and reliable automated screening system.

Our bar screens can be used for the removal of gross solids from water, stormwater and sewage streams. These consists of uniformly spaced bar racks with bars at 15-50mm spacing placed in open channels. Material in the flow caught on the bars is removed by an automatic screenings removal system.

AquaScreen Series B Come in Three Designs, each With Their Own Special Features

Design Advantages

- Tapered bars with narrow upstream aperture capture material at the surface and reduce risk of material jamming within the screen bars
- Screen bars are inclined at about 70° to horizontal to increase effective screening area
- Resettable overload couplings prevent mechanical damage. Electrical indication of overload is available.
- Suitable for channels substantially below grade
- Raking tynes contact the screen at an angle greater than 90° to lift screenings from the bars

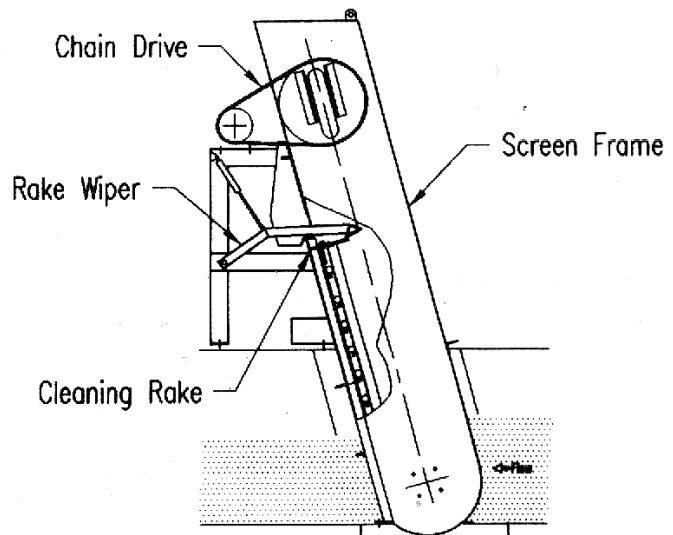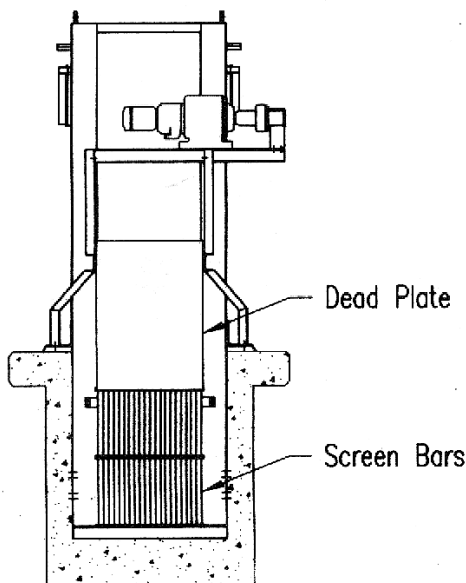

AQUASCREEN SERIES B-CT

- Machined tynes ensure accurate tooth spacing and minimum clearance for highest possible removal efficiency
- A range of compatible screenings conveyors, presses and turntables is available for total handling capacity

General Design Features

AquaScreen Series B - CT Chain and Tyne

- Simple low cost design using continuous chains operating in replaceable stainless steel guides and carrying a series of raking combs
- Lower sprockets run in either sealed bearings with forced lubrication or water lubricated Thordon bushes supported by stainless steel shafting
- Used on any depth channel

AquaScreen Series B - CL Climber

- The climber mechanism reduces the risk of jamming and wear

•The mechanism utilises a fixed rack engaged by the driving sprocket

•All rotating equipment remain above water level. This is made possible by the raking trajectory being produced by guide wheels operating in a track above the channel

AquaScreen Series B - BR Back Raked

•Accepts any objects of any size without jamming


•Rake mechanism operates on the down stream side of the screen bars. Any object too large is just not removed

•Can be totally enclosed making it safe for operation in public areas

•Raking mechanism is otherwise similar to chain and tyne screens

Applications

- Water treatment inlet screen
- Sewage treatment inlet screen
- Waste sludge screen
- Stormwater screening
- Sewer overflow screen

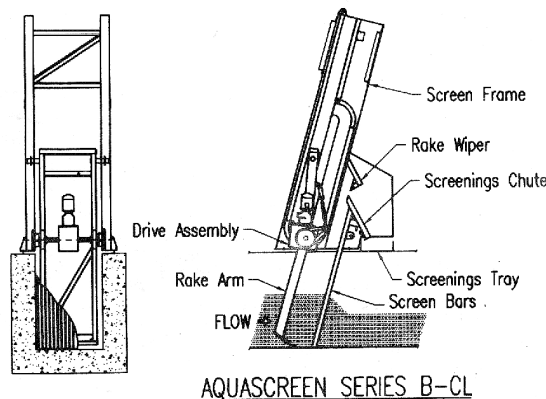

The manufacturer reserves the right to alter performance, specification or design without notice.



Ipswich – Head Office

119 Toongarra Road
Ipswich QLD 4305 AUS
TEL: +61(0) 7 3813 7100
FAX: +61(0) 7 3813 7199

Adelaide

356 Shepherds Hill Road
Blackwood SA 5051 AUS
TEL: +61(0) 8 7002 6900
FAX: +61(0) 8 7002 6999

Sydney

8 Charles Street
St Mary's NSW 2760 AUS
TEL: +61(0) 2 8603 5200
FAX: +61(0) 1 8603 5299

Melbourne

10/64 Oakover Road
Preston VIC 3072 AUS
TEL: +61(0) 9480 8000
FAX: +61(0) 9480 8099

EMAIL: enquiries@aquatecmaxcon.com.au

Web: www.aquatecmaxcon.com.au